

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number
WO 2005/084864 A1

(51) International Patent Classification⁷: **B23G 9/00**

(21) International Application Number:
PCT/IL2005/000267

(22) International Filing Date: 7 March 2005 (07.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
160767 7 March 2004 (07.03.2004) IL

(71) Applicant (for all designated States except US): **SHILO
TECHNOLOGIES, LTD.** [IL/IL]; P.O. Box 27331, 91273
Jerusalem (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ABRAHAM, Moshe**

[IL/IL]; Shilo, 44830 Mobile Post Ephraim (IL). **STAHL,
Zeev** [IL/IL]; 43/4 Haim Toren Street, Pisgat Zeev, 97823
Jerusalem (IL). **FREDKIN, Binyamin** [IL/IL]; Gush Et-
zion, P.O. Box 179, 90433 Alon Shvut (IL).


(74) Agent: **WOLFF, BREGMAN AND GOLLER**; P.O. Box
1352, 91013 Jerusalem (IL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: TOOL FOR REPAIRING DAMAGED SCREW THREADS

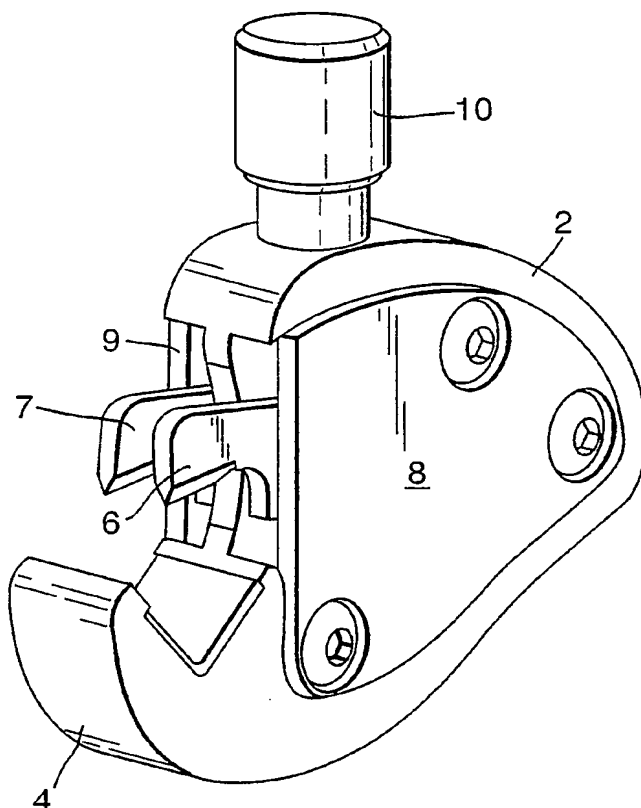

(57) Abstract: There is provided a tool
for repair of damaged threads of screws,
including a body (2) having a projecting
portion (4) for accommodating a screw to
be repaired and having two recessed major
surfaces; a cutting blade (6), having a rear
end hingedly articulated to the body (2),
and a front end in the shape of a cutting face
(46) substantially fitting the type of thread
to be repaired; a guide blade (7) having a
rear end hingedly articulated to the body
(2), and a front end substantially fitting the
type of thread to be repaired, the guide blade
projecting beyond the cutting face of the
cutting blade, and; means (10, 12, 14) to alter
the distance between the front ends and the
projecting body portion (4) to accommodate
screws of different diameters.

BEST AVAILABLE COPY

WO 2005/084864 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.